
Residential J Series

SCHLAGE

$97 any set with deadbolt any color

Grade 3 Knob/lever designs

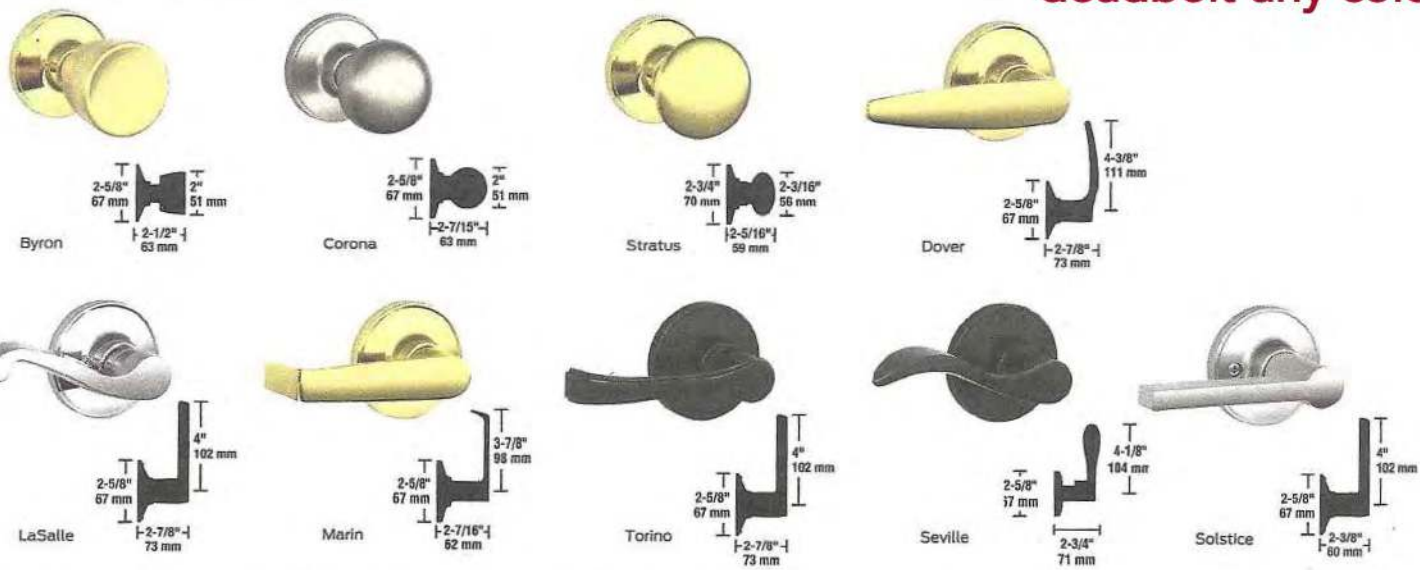

Dover, Marin and Torino lever designs are non-handed. LaSalle and Seville are reversible.

Specifications

Applications	Residential single-family and multi-family use
Certifications	ANSI A156.2, 1996, Series 4000 Grade 3.
Exposed trim	Levers are zinc-based; plated to match finishes indicated. Knobs are brass or stainless steel; plated to match finishes indicated.
Keying	5-pin tumbler Schlage C keyway with two brass keys.
Door range	1 3/8" to 1 3/4" (35mm to 44mm) standard.
Backset	Universal latch standard, fits either 2 3/8" (60mm) or 2 3/4"(70mm) backsets.
UL listing	Knobs/levers available with UL listing. Box pack only.

Finishes

Knobs	605	609	619	620	625	626	630	716
Byron	▪	▪					▪	
Corona	▪	▪	▪	▪	▪		▪	▪
Stratus	▪	▪	▪		▪		▪	▪
Dover	▪	●					▪	
Levers								
LaSalle	▪	▪	▪					▪
Marin			▪				▪	
Torino	▪	▪	▪	●	▪		▪	▪
Seville	▪	▪	▪		▪			▪
Solstice			▪		▪	▪		▪

● Discontinued; available while supplies last

Standard features


- Limited lifetime mechanical warranty, five-year finish warranty
- Schlage C keyways can be keyed to Schlage locks for one-key convenience

Latches and strikes

Latches: 1" x 2 1/4" (25 mm x 57 mm), 1/2" (13 mm) throw standard. Dual option faceplates, including 1 1/8" (29 mm) round corner and circular drive-in, are standard for passage and privacy functions. Keyed functions also come with 1 1/8" (29 mm) square corner faceplates standard, in addition to round corner and circular drive-in. 1 1/8" (29 mm) faceplate adaptors available.

Strikes: Full lip, 1 5/8" x 2 1/4" (41mm x 57mm), 1 1/8" (29mm) lip, #10-026, standard. Optional strikes: full lip, 1/4" (6mm) radius round corner; circular drive-in, ANSI 1 1/4" x 4 7/8" (32mm x 124mm), 1 3/16" (30mm) lip. UL Listed locks are furnished with #10-001 T strike,1 1/8" x 2 3/4" (29mm x 70mm), 1 1/8" (29mm) lip (also available with standard product).

Door preparation



See templates.


= Helps meet LEED certification

ALLEGION

$144 any style all colors

SCHLAGE

Grade 3 Handleset/deadbolt designs

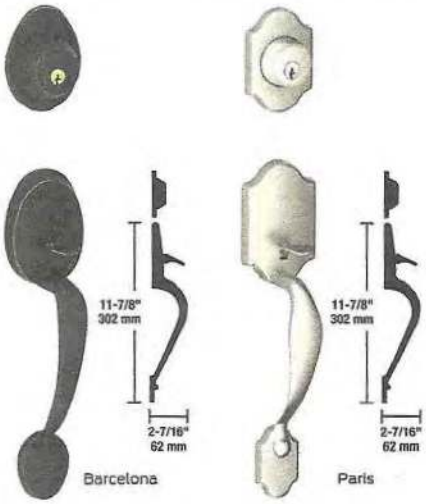



JD60
JD Series single cylinder



JD80
JD Series one-sided deadbolt



JD81
JD Series one-sided deadbolt w/ exterior plate

Handleset specifications

Applications	Residential single-family and multi-family use
Certifications	ANSI A156.5, 2001, Grade 3.
Exposed trim	Handlesets are zinc-based; plated to match finishes indicated.
Keying	Schlage C keyway with two brass keys. Locks are keyed 5-pin.
Door Range	1 3/8" to 1 3/4" (35mm to 44mm) standard.
Backset	Universal latch standard, fits either 2 3/8" (60mm) or 2 3/4" (70mm) backsets.
Warranty	Limited lifetime mechanical warranty, five-year finish warranty.
UL Listing	Single cylinder deadbolt/handleset available with UL Listing - box pack only.

Latches and strikes

Latches: 1" x 2 1/4" (25 mm x 57 mm), 1/2" (13 mm) throw standard. Dual option faceplates including 1 1/8" (29 mm) round corner and circular drive-in are standard for passage and privacy functions. Keyed functions also come with 1 1/8" (29 mm) square corner faceplates standard, in addition to round corner and circular drive-in. 1 1/16" (29 mm) faceplate adaptors available.

Strikes: Full lip, 1 5/8" x 2 1/4" (41mm x 57mm), 1 1/8" (29mm) lip, #10-026, standard. Optional strikes: full lip, 1/4" (6mm) radius round corner; circular drive-in, ANSI 1 1/4" x 4 7/8" (32mm x 124mm), 1 3/16" (30mm) lip. UL Listed locks are furnished with #10-001 T strike, 1 1/8" x 2 3/4" (29mm x 70mm), 1 1/8" (29mm) lip (also available with standard product).

= Helps meet LEED certification

Deadbolt specifications

Applications	Residential single-family and multi-family use
Certification	ANSI A156.5, 2001 Grade 3.
Exposed trim	Wrought brass or bronze.
Keying	Schlage C keyway with two brass keys. Locks are keyed 5-pin.
Door range	1 3/8" to 1 3/4" (35mm to 44mm) standard.
Backset	Universal latch standard, fits either 2 3/8" (60mm) or 2 3/4" (70mm) backsets.
Warranty	Limited lifetime mechanical warranty, five-year finish warranty.
UL Listing	Single cylinder deadbolt product available with UL Listing - box pack only.


Finishes


Handlesets	605	608	609	618	619	620	622	625	630	716
Barcelona	▪		▪		▪	▪		▪	▪	▪
Paris	▪		▪		▪			▪	▪	▪
Deadbolts										
JD60	▪		▪		▪	▪		▪	▪	▪
JD80	▪		▪		▪				▪	▪
JD81	▪		▪		▪				▪	

*Discontinued; available while supplies last

Door preparation


See templates.





Residential F Series handlesets

$211 Exterior handlesets

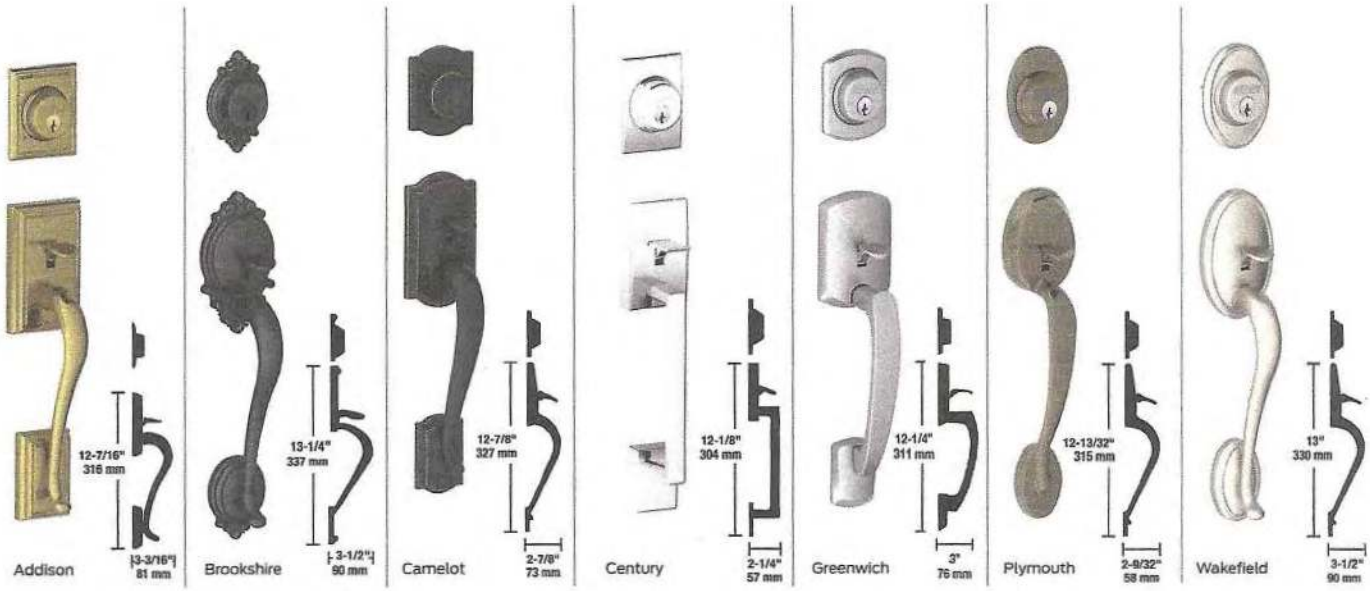

Standard features


- Grade 1 highest residesntial security rating
- Limited lifetime mechanical and finish warrany
- Finishes on latches, strikes, and screws match finish on grip handleset
- Adjustable throughbolt can move up and down 1-1/2" to fit a variety of pre-existing holes

Finishes

Handlesets	605	608	609	613	618	619	620	621	622	625	626	716
Addison	▪		▪			▪	▪	▪	▪	▪		▪
Brookshire	▪		▪			▪			▪			▪
Camelot	▪	▪	▪	▪		▪	▪		▪	▪		▪
Century	▪		▪		▪	▪			▪	▪	▪	▪
Greenwich					▪	▪			▪	▪	▪	▪
Plymouth	▪		▪	▪		▪	▪		▪	▪	▪	▪
Wakefield	▪		▪	▪	▪	▪	▪		▪	▪	▪	▪

Door preparation

Two piece handleset

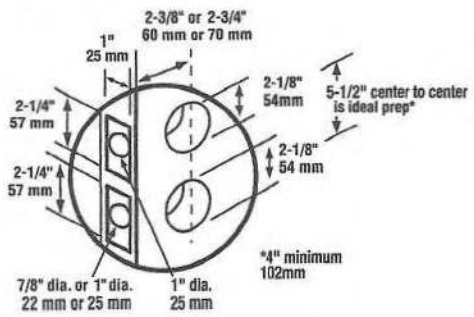

Residential lock finishes



505/605 Bright brass | 608 Satin brass | 609 Antique brass | 613 Oil rubbed bronze | 618 Polished nickel | 619 Satin nickel



620 Antique pewter | 621 Distressed nickel | 622 Matte black | 625 Bright chrome | 626 Satin chrome | 716 Aged bronze

= Helps meet LEED certification

ALLEGION

Select Interior



Standard features

- Limited lifetime mechanical and finish warranty
- Field-reversible levers on privacy, passage and keyed functions
- Key-removable outside knobs or levers for easy cylinder replacement
- Meets 400,000 cycle ANSI Grade 2 requirements
- Concealed screws on Andover and Greyson style roses

Latches and strikes

Latches: 1" x 2 1/4" (25mm x 57mm), 1/2" (13mm) throw standard. Dual option faceplates, including 1 1/8" (29mm) round corner and circular drive-in, are standard for passage and privacy functions. Square corner faceplates available.

Strikes: Full lip, 1/4" (6mm) radius corner, 1 5/8" x 2 1/4" (41mm x 57mm), 1 1/8" (29mm) lip, #10-027, standard. Optional strikes: full lip; square corner; circular drive-in, ANSI 1 1/4" x 4 7/8" (32mm x 124mm), 1 3/16" (30mm) lip. UL Listed locks are furnished with #10-001 T strike, 1 1/8" x 2 3/4" (29mm x 70mm), 1 1/8" (29mm) lip (also available with standard product).

Specifications

Applications	Residential single-family and multi-family use
Certifications	ANSI A156.2, 1996, Series 4000 Grade 2. UL Listed locks for 3-hour fire doors are furnished with #10-001 T strike, 1 1/8" x 2 3/4" (29mm x 70mm), 1 1/8 (29mm) lip (also available with standard product). Assembled to order when specified with "F" suffix. Example: F51F
Exposed trim	Levers are plated to match finishes indicated.
Keying	5-pin tumbler C keyway with two keys. All F51A functions offer interior emergency exit feature.
Door range	1 3/8" to 1 3/4" (35mm to 44mm) standard.
Backset	Fits either 2 3/8" (60mm) or 2 3/4" (70mm) backset.

= Helps meet LEED certification